

O'Pro +

WIDE RANGE WITH O'PRO PROTECTION TECHNOLOGY
FOR +50% TANK LIFETIME



+ PRODUCT

COMFORT

- Control knob on the bottom of the tank
- Flat chromed thermometer
- Wide range of capacities and models to fit all interior requirements

QUALITY - DURABILITY

- Long tank lifetime thanks to O'Pro exclusive anti-corrosive system
- Magnesium anode for strengthened tank protection
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange

USER-FRIENDLINESS

- IP 24 - full compliance with European standards for electrical safety and user protection
- Heating light indicator


SAVINGS

- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

ELECTRIC WATER HEATER

30 TO 120 L
(VERTICAL WALL-MOUNTED)

50 TO 100 L
(HORIZONTAL WALL-MOUNTED)



Model available*



Warranty



Anti-corrosive
technology



Gulf Technical Regulation
on Low Voltage Electrical
Equipment and Appliances



الإمارات العربية المتحدة
Emirates Quality Mark

GCC energy regulation

*Model types: A: Vertical wall-mounted / B: Horizontal wall-mounted / C: Floor-standing

O'Pro +




- 1 External thermometer
- 2 Diamond-quality enamel (glass-lined inner tank)
- 3 Optimised stainless outlet pipe
- 4 Magnesium anode
- 5 Sheathed immersion heating element
- 6 Inlet diffuser
- 7 Thermostat
- 8 High-density polyurethane foam 0% CFC
- 9 O'Pro anti-corrosive system
- 10 Bottom control knob
- 11 Dielectric union




INSTALLATION DIMENSIONS

Vertical wall-mounted



Horizontal wall-mounted

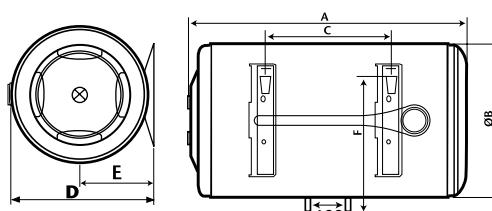

TECHNICAL DATA

CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	ENERGY CONSUMPTION (kWh/24 h AT 65°C)	HEAT-UP TIME AT 60°C ($\Delta T=50^\circ\text{C}$)
O'Pro+ Vertical wall-mounted				
30	1200	230 (220/240)	0.68	1h19
50	2000 ⁽¹⁾	230 (220/240)	0.903	1h25
80	2000 ⁽¹⁾	230 (220/240)	1.213	2h34
100	2000 ⁽¹⁾	230 (220/240)	1.523	3h05
120	2000 ⁽¹⁾	230 (220/240)	1.905	3h54
O'Pro+ Horizontal wall-mounted				
50	1500	230 (220/240)	1.062	1h48
80	1500	230 (220/240)	1.327	2h53
100	1500	230 (220/240)	1.608	3h58

DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)							FLANGE OPENING (\emptyset) mm	NET WEIGHT (Kg)	ESMA ENERGY EFFICIENCY
	A	B	C	D	E	F	G			
O'Pro+ Vertical wall-mounted										
30	448	433	248	451	158	300	239	72	12	★★★★★
50	612	433	382	451	158	300	239	72	16	★★★★★
80	859	433	592	451	158	300	239	72	20	★★★★★
100	1021	433	742	451	158	300	239	72	22	★★★★★
120	1186	433	917	451	158	300	239	72	29	★★★★★
O'Pro+ Horizontal wall-mounted										
50	596	433	198	451	228	346	-	72	15	★★★★★
80	843	433	349	451	228	346	-	72	21	★★★★★
100	1005	433	497	451	228	346	-	72	24	★★★★★

(1) Depending on models